

# EXAIR®

MANUFACTURING INTELLIGENT COMPRESSED AIR® PRODUCTS SINCE 1983



**COAT**



**CONSERVE**



**COOL**



**CONVEY**



**CLEAN**



2013 **Green** Manufacturer  
Product Innovation Award



**GOLDEN**  
MOUSETRAP  
AWARDS  
2013 FINALIST

2013  
Plant Engineering  
**PRODUCT**  
of the YEAR  
Gold Award

**1" Flat Super  
Air Nozzle**

**27**  
CATALOG

**TECHHELP**  
1-800-903-9247  
**DIRECT**

YOU REQUESTED THIS CATALOG AND PRICE LIST.  
PLEASE SEE MAILING LABEL ON BACK COVER.

Terms and Conditions ..... 2

**EXAIR Optimization ..... 3**

- Electronic Flow Control ..... 4
- Digital Sound Level Meter ..... 6
- Ultrasonic Leak Detector ..... 7
- Digital Flowmeter ..... 9

**Air Knives ..... 11**

- Super Air Knife ..... 11
- PVDF Super Air Knife ..... 17
- Universal Air Knife Mounting System ..... 20
- NEW** Long Super Air Knife ..... 22
- Standard Air Knife ..... 24
- Full-Flow Air Knife ..... 27

**Air Wipes ..... 29**

- Super Air Wipes ..... 29
- Standard Air Wipes ..... 33

**Air Amplifiers ..... 35**

- Super Air Amplifiers ..... 37
- Adjustable Air Amplifiers ..... 41

**Air Nozzles and Jets ..... 43**

- Air Nozzles ..... 43
- Super Air Nozzles ..... 46
- Air Jets ..... 50
- High Force Air Nozzles ..... 52
- NEW** Large Super Air Nozzles ..... 53
- Super Air Nozzle Clusters ..... 56
- Stay Set Hoses ..... 56

**Atomizing Nozzles ..... 59**

- Internal Mix Narrow Angle Round Atomizing Nozzles ..... 60
- Internal Mix Wide Angle Round ..... 61
- Internal Mix Flat Fan Atomizing Nozzles ..... 62
- NEW** Internal Mix Deflected Flat Fan Atomizing Nozzles ..... 63
- NEW** Internal Mix 360° Hollow Circular Atomizing Nozzles ..... 63
- External Mix Round Atomizing Nozzles ..... 64
- External Mix Narrow Angle Flat Fan ..... 65
- External Mix Wide Angle Flat Fan Nozzles ..... 66
- Siphon Fed Round Atomizing Nozzles ..... 67
- Siphon Fed Flat Fan Atomizing Nozzles ..... 68
- No Drip Internal Mix Narrow Angle Round ..... 70
- No Drip Internal Mix Wide Angle Round ..... 70
- No Drip Internal Mix Flat Fan ..... 70
- NEW** No Drip Internal Mix Deflected Flat Fan ..... 70
- NEW** No Drip Internal Mix 360° Hollow Circular ..... 70
- No Drip External Mix Round ..... 70
- No Drip External Mix Narrow Angle Flat Fan ..... 70
- No Drip External Mix Wide Angle Flat Fan ..... 70
- No Drip Siphon Fed Round ..... 70
- No Drip Siphon Fed Flat Fan ..... 70

**Safety Air Guns ..... 72**

- Chip Shields ..... 73
- Precision Safety Air Guns ..... 74
- NEW** Soft Grip Safety Air Guns ..... 74
- NEW** Heavy Duty Safety Air Guns ..... 76
- Super Blast Safety Air Guns ..... 77

**Static Eliminators ..... 79**

- Super Ion Air Knife ..... 81
- Power Supplies ..... 83
- Standard Ion Air Knife ..... 87
- Ionizing Bars ..... 89
- Super Ion Air Wipes ..... 91
- Ion Air Cannon ..... 93
- Ion Air Gun ..... 95
- Ion Air Jet ..... 97
- Stay Set Ion Air Jet ..... 97
- Ionizing Point ..... 99
- Static Meter, AC Sensor ..... 100

**E-Vac® Vacuum Generators ... 101**

- How to Build an E-Vac System ..... 102
- In-Line ..... 105
- Adjustable ..... 106
- Vacuum Cups ..... 108

**Air Operated Conveyors ..... 112**

- Line Vac ..... 112
- Threaded Line Vac ..... 118
- Heavy Duty Line Vac ..... 120
- Light Duty Line Vac ..... 122

**Industrial Housekeeping ..... 124**

- Reversible Drum Vac ..... 124
- NEW** High Lift Reversible Drum Vac ..... 126
- Chip Trapper ..... 128
- Chip Vac ..... 130
- Heavy Duty Dry Vac ..... 132
- NEW** Heavy Duty HEPA Vac ..... 134
- Vac-u-Gun ..... 136

**Vortex Tubes & Spot Cooling . 138**

- Vortex Tubes ..... 138
- Adjustable Spot Cooler ..... 146
- Mini Cooler ..... 149

**Cold Gun Aircoolant Systems . 150**

**Cabinet Cooler® Systems ..... 154**

- NEMA 12, 4 and 4X ..... 156
- Electronic Temperature Control ..... 159

**Accessories ..... 163**

- Filters ..... 163
- Regulators ..... 164
- Silencing Mufflers ..... 165
- Receiver Tank ..... 166
- Valves, Swivels, Thermostats ..... 167
- Magnetic Bases, Stay Sets, Hoses ..... 168

**Page 3 EXAIR Optimization**  
Minimize Compressed Air Use and Detect Wasteful Leaks

**Page 11 Air Knives**  
Blowoff, Clean, Dry and Cool with Less Noise and Air Consumption

**Page 29 Air Wipes**  
Blowoff, Dry, Clean and Cool Pipe, Cable, Extruded Shapes and Hose

**Page 35 Air Amplifiers**  
Vent, Exhaust, Cool, Dry and Clean - with No Moving Parts

**Page 43 Air Nozzles and Jets**  
Reduce Noise Levels and Air Costs on Blowoff Operations

**Page 59 Atomizing Nozzles**  
All Stainless Steel Construction for Durability and Corrosion Resistance!

**Page 72 Safety Air Guns**  
Safety Air Guns Use Engineered Air Nozzles for High Performance

**Page 79 Static Eliminators**  
Eliminate Static Electricity, Dust and Shock Hazard

**Page 101 E-Vac® Vacuum Generators**  
Vacuums for Lifting, Clamping, Mounting and Placement

**Page 112 Air Operated Conveyors**  
Convey Parts, Materials and Waste - with No Moving Parts

**Page 124 Industrial Housekeeping**  
Reliable Vacuums for Chip Removal, Liquid Transfer and Cleaning

**Page 138 Vortex Tubes and Spot Cooling**  
Cold Air for Industrial Spot Cooling Problems

**Page 150 Cold Gun Aircoolant Systems**  
Cool Machining Operations with Clean, Cold Air

**Page 154 Cabinet Cooler® Systems**  
Cool and Purge NEMA 12, 4 and 4X Electrical Control Panels

**Page 163 Accessories**  
Mufflers, Filters, Regulators, Valves, Swivel Fittings and More

# Terms and Conditions (U.S. and Canada Only)

**Terms:** Net 30 days upon credit approval, Visa, MasterCard, Discover and American Express.



Cards

**ICC (International Chamber of Commerce) INCOTERM 2010:** EX WORKS (EXAIR Corporation, 11510 Goldcoast Dr., Cincinnati, Ohio 45249, USA.)

**Delivery:** All cataloged products are shipped from stock, via U.P.S. within 24 hours after receipt of order. Priority shipment is available upon request.

**Ordering:** Call 1-800-903-9247 or 513-671-3322 Worldwide  
8:00 a.m. to 5:00 p.m. ET (Mon. - Fri.)  
Fax toll free 1-866-329-3924 or  
513-671-3363 Worldwide  
E-mail: [orders@exair.com](mailto:orders@exair.com)  
[www.exair.com](http://www.exair.com) (secure web site)

**Remit to address (payments only):**

EXAIR Corporation  
Location 00766  
Cincinnati, Ohio 45264-0766

**Tax:** Sales and use tax, where applicable, are not included.

**Technical Assistance:** Please call our Application Engineering Department, 1-800-90-EXAIR (1-800-903-9247).

**Warranty:** 5 Year "Built To Last" Warranty against defects in workmanship and materials on all compressed air products\*. Defective products must be returned freight prepaid for repair or replacement at our option. This warranty applies under conditions of normal use, but does not apply to defects that result from intentional damage, negligence, unreasonable use, wear or exposure.

**Built to Last 5 Year WARRANTY**

\*5 Year Warranty applies to compressed air products only.

A 1 Year Warranty applies to all accessories and electrically powered products.

**EXAIR's Unconditional Guarantee:**

Extends to all U.S. and Canadian customers and includes invoiced U.P.S. Ground Service shipping charges. Products returned after the 30 day guarantee period are subject to a 15% restocking charge. Products must be returned freight prepaid.



11510 Goldcoast Dr.  
Cincinnati, Ohio 45249-1621  
**Phone Number:** (513) 671-3322  
**Fax Number:** (513) 671-3363  
**E-mail:** [techhelp@exair.com](mailto:techhelp@exair.com)  
**Web Site:** [www.exair.com](http://www.exair.com)



**OSHA and CE Compliance:** EXAIR compressed air products comply with OSHA's Safety Requirements, the EU General Product Safety Directive (2001/95/EC) and meet the noise limitation requirements of the EU Machinery Directive (2006/42/EC). EXAIR's Electronic Flow Control and Electronic Temperature Control meet the low voltage standards of the EU Low Voltage Directive (2006/95/EC). Some EXAIR products display the CE mark where there are applicable directives. All sound level measurements are taken at 3 feet away.

**RoHS:** Electrical portions of EXAIR's static eliminators, EFC, ETC, solenoid valves, and thermostats comply with the RoHS (Restriction of Hazardous Substances) Directive 2002/95/EC, including the amendment outlined in the European Commission decision L 214/65.

**Reach:** Per Regulation (EC) No 1907/2006 Title I, Article 3, paragraph 3, the European Union has recently enacted legislation to register chemicals and substances imported into the EU to ensure a high level of protection of human health and the environment.

Per Title II, Article 7, paragraph 1, articles (products) must be registered when a substance is intended to be released under normal or reasonably foreseeable conditions of use and it is present in those articles in quantities totaling over 1 metric ton per producer or importer per year. Registration of EXAIR products is not required since they do not contain substances that are intentionally released.

**Conflict Mineral Free:** Look for this symbol to designate conflict mineral free products throughout our catalog. EXAIR supports Section 1502 of the



Dodd-Frank Wall Street Reform and Consumer Protection Act and we are committed to compliance with the conflict minerals rule in order to curb the illicit trade of tin, tantalum, tungsten and gold in the DRC region. EXAIR is using the EICG-GeSI template to document our supply chain and commitment to conflict free products.

**Copyright Restrictions:** The content of the EXAIR Catalog, including all photos, graphics, drawings and arrangements are proprietary to EXAIR Corporation and are protected by the United States and international copyright and trademark laws. You are authorized to use the contents of the EXAIR Catalog for personal use or as it relates to your role as a current or prospective customer of EXAIR. The contents of this catalog may not be copied or modified for any type of publication or distribution without the prior written consent of EXAIR Corporation. The content of the EXAIR Catalog is the intellectual property solely of the EXAIR Corporation with no rights transferred to other parties. No part of this catalog may be reproduced for any commercial purposes without the express authorization in writing by the EXAIR Corporation.

**Trademarks:** "EXAIR", "Cabinet Cooler", "E-Vac", "Intelligent Compressed Air", and "Compressed Air Intelligence" are registered trademarks of the EXAIR Corporation. The EXAIR logo, product names, designs and descriptive phrases are trademarked by EXAIR Corporation. These trademarks may not be used without prior written permission of the EXAIR Corporation.

EFC, Digital Flowmeter, Digital Sound Level Meter, High Power Cold Gun, Super Air Knife, Standard Air Knife, Full-Flow Air Knife, Air Cannon, Super Air Amplifier, Adjustable Air Amplifier, Super Air Nozzle, Micro Air Nozzle, High Power Safety Air Nozzle, Stay Set Hose, Super Blast Safety Air Gun, Super Air Wipe, Standard Air Wipe, Super Ion Air Knife, Standard Ion Air Knife, Super Ion Air Wipe, Ion Air Cannon, Ion Air Gun, Ion Air Jet, Ionizing Point, Stay Set Ion Air Jet, Line Vac, Chip Vac, Heavy Duty Dry Vac, Heavy Duty HEPA Vac, Reversible Drum Vac, High Lift Reversible Drum Vac, Chip Trapper, Vac-u-Gun, Air Disk, Air Stik, Mini Cooler, Cold Gun Aircoolant System, and ETC are trademarks of EXAIR Corporation.



Intelligent Compressed Air® products are identified throughout this catalog that can help your plant save tens of thousands of dollars over the course of a single year. *The Best Practices for Compressed Air Systems* manual published by the Compressed Air Challenge® recommends products like the Super Air Knife™, Super Air Amplifier™, and the family of Super Air Nozzles™ for energy conservation. Many of the products shown offer unique ways to solve common industrial problems using compressed air. Compressed Air Challenge is a registered trademark of Compressed Air Challenge, Inc.



EXAIR has partnered with Energy Star, a voluntary program of the U.S. Department of Energy and the Environmental Protection Agency. Energy Star offers energy efficient solutions to help save money while protecting the environment for future generations. EXAIR has implemented improved energy management practices and technologies throughout our facility, including energy efficient lighting, HVAC systems, and electronic thermostats. EXAIR's participation in this program underscores our commitment to conserving energy.

EXAIR products are subject to ongoing development. Specifications are subject to change without notice.

Some products in this catalog are covered by U.S. Patent #5402938, #8153001 and #8268179 and others may be U.S. Patent Pending.

Copyright ©2014 EXAIR Corporation. All Rights Reserved.





# Cabinet Cooler® Systems



## Cabinet Cooler® Systems

Stop electronic control downtime due to heat, dirt, and moisture!

Cabinet Coolers maintain NEMA 4, 4X, and 12 integrity. All Cabinet Coolers are



and CE compliant!

### What is an EXAIR Cabinet Cooler System?

A low cost, reliable way to cool and purge electronic control panels. EXAIR Cabinet Coolers incorporate a vortex tube to produce cold air from compressed air - **with no moving parts**. The compact Cabinet Cooler can be installed in minutes through a standard electrical knockout. NEMA 12, 4, and 4X Cabinet Coolers that match the NEMA rating of the enclosure are available in many cooling capacities for large and small control panels.



Watch the video!

[www.exair.com/ccvideo.htm](http://www.exair.com/ccvideo.htm)

### Why EXAIR Cabinet Cooler Systems?

The vortex tubes incorporated in the EXAIR Cabinet Coolers are constructed of **stainless steel**. The wear, corrosion and oxidation resistance of stainless steel assures long life and maintenance free operation. **All Cabinet Coolers are UL Listed and CE compliant.**



EXAIR Cabinet Cooler Systems accurately maintain the temperature inside enclosures.



A Model 4830 NEMA 4 Cabinet Cooler cools a panel with 20°F air while keeping the inside dry.

### Applications

- Programmable controllers
- Line control cabinets
- Motor control centers
- Relay panels
- NC/CNC systems
- Modular control centers
- CCTV cameras
- Computer cabinets
- Laser housings
- Electronic scales
- Food service equipment

### Advantages

- Low cost
- Compact
- Cooling capacities to 5,600 Btu/hr. (1,411 Kcal/hr.)
- Quiet
- Install in minutes
- Maintain NEMA 12, 4 and 4X integrity (IP54 and IP66)
- Stabilize enclosure temperature and humidity
- No CFC's
- No moving parts-maintenance free
- Mount in standard electrical knockout

- Stop nuisance tripping
- Stop heat damage
- Eliminate fans and filters
- Eliminate lost production
- Stop circuit drift
- Stop dirt contamination
- Provide washdown protection

### Special Cabinet Coolers

- High temp. models for ambients up to 200°F (93°C) available
- Type 316 stainless steel available
- Purge models for non-hazardous locations available




## Selecting The Right Model


EXAIR Cabinet Cooler® Systems are available with or without thermostat control. The continuous coolers (Model 4200 and 4700 series) are recommended when constant cooling and a constant positive purge are desirable. The thermostatically controlled systems (Model 4300 and 4800 series) save air by activating the cooler only when internal temperatures approach critical levels. The adjustable thermostat is factory set at 95°F (35°C). Thermostatic systems are recommended where heat load fluctuates and continual purge is not required.

All EXAIR Cabinet Cooler® Systems contain a 5 micron **Automatic Drain Filter** for the compressed air supply and a **Cold Air Distribution Kit** to circulate the cold air throughout the enclosure. See page 159 for details.

## How The Cabinet Cooler Works




Compressed air enters the vortex tube powered Cabinet Cooler and is converted into two streams, one hot and one cold. (For more information on vortex tube operation, see page 139.) Hot air from the vortex tube is muffled and exhausted through the **vortex tube exhaust**. The cold air is discharged into the control cabinet through the cold air distribution kit. The displaced hot air in the cabinet rises and exhausts to atmosphere through the **cabinet air exhaust** at a slight positive pressure. Thus, the control cabinet is both cooled and purged with cool, clean air. **Outside air is never allowed to enter the control panel.**

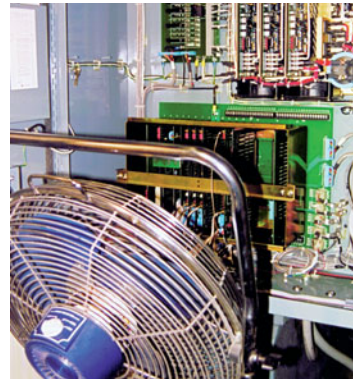

A dangerous shock hazard exists when the panel door is opened to let a fan blow hot, dirty shop air at the electronics.

Cabinet Coolers



## Heat Can Stop Your Machines

When hot weather causes the electronics inside a control cabinet to fail, there is a panic to get the machinery up and running again. There are several cooling options out there and it's important to know the facts.

### A. Heat Exchangers and Heat Pipes

These have serious limitations. On hot summer days when the temperatures of the room and inside of the enclosure are about equal, there's not enough difference for effective heat exchange.

- They fail when dust and dirt clog the filter
- The cooling capacity is limited due to ambient conditions

### B. Refrigerant Panel Air Conditioners

These coolers are prone to failure in dirty, industrial environments when dust and dirt clog the filter.

- It takes almost a day to install
- Vibration from machinery causes refrigerant leaks and component failures

### C. "Plastic Box" Coolers

The "plastic box" cooler from a competitor uses an inaccurate mechanical thermostat that's designed for liquids. This thermostat has a poor ability to react quickly to changes in air temperature.

**It costs up to 85% more to operate than EXAIR's ETC Cabinet Cooler® System with the same SCFM rating and Btu/hr. output.**

- Electronics can overheat before it turns on
- It runs far longer than necessary before shutting off

## EXAIR Cabinet Cooler® Systems

EXAIR has a complete line of Cabinet Cooler Systems to dependably cool and purge your electrical enclosures. They convert an ordinary supply of compressed air into clean, cold 20°F (-7°C) air. They mount in minutes through an ordinary electrical knockout and have no moving parts to wear out. The compressed air filtration that is provided keeps water, oil and other contaminants out of the enclosure.

- There is no room air filter to clog
- An accurate electrical thermostat control minimizes compressed air use
- All Cabinet Coolers are UL Listed to US and Canadian safety standards
- They are the only compressed air powered coolers that are CE compliant

# Cabinet Cooler® Systems

Cabinet Cooler® System Specifications					
Model #	Capacity* Btu/hr. Kcal/hr.	Thermostat Control	Sound Level dBA		
<b>NEMA 12 (IP54)</b> (Dust, Oil resistant)	4204	275	69	No	59**
	4208	550	139	No	67**
	4215	1,000	252	No	73**
	4225	1,700	428	No	74**
	4230	2,000	504	No	74**
	4240	2,800	706	No	78**
	4250	3,400	857	No	75**
	4260	4,000	1,007	No	77**
	4270	4,800	1,209	No	77**
	4280	5,600	1,411	No	79**
	4304	275	69	Yes	59**
	4308	550	139	Yes	67**
	4315	1,000	252	Yes	73**
	4325	1,700	428	Yes	74**
	4330	2,000	504	Yes	74**
	4340	2,800	706	Yes	78**
	4350	3,400	857	Yes	75**
4360	4,000	1,007	Yes	77**	
4370	4,800	1,209	Yes	77**	
4380	5,600	1,411	Yes	79**	
<b>NEMA 4 (IP66)</b> (Splash resistant)	4704	275	69	No	59**
	4708	550	139	No	67**
	4715	1,000	252	No	73
	4725	1,700	428	No	80
	4730	2,000	504	No	80
	4740	2,800	706	No	82
	4750	3,400	857	No	84
	4760	4,000	1,007	No	84
	4770	4,800	1,209	No	84
	4780	5,600	1,411	No	85
	4804	275	69	Yes	59**
	4808	550	139	Yes	67**
	4815	1,000	252	Yes	73
	4825	1,700	428	Yes	80
	4830	2,000	504	Yes	80
	4840	2,800	706	Yes	82
	4850	3,400	857	Yes	84
4860	4,000	1,007	Yes	84	
4870	4,800	1,209	Yes	84	
4880	5,600	1,411	Yes	85	
<b>NEMA 4X (IP66)</b> (Corrosion resistant)  (Available in 316SS)	4704SS	275	69	No	59**
	4708SS	550	139	No	67**
	4715SS	1,000	252	No	73
	4725SS	1,700	428	No	80
	4730SS	2,000	504	No	80
	4740SS	2,800	706	No	82
	4750SS	3,400	857	No	84
	4760SS	4,000	1,007	No	84
	4770SS	4,800	1,209	No	84
	4780SS	5,600	1,411	No	85
	4804SS	275	69	Yes	59**
	4808SS	550	139	Yes	67**
	4815SS	1,000	252	Yes	73
	4825SS	1,700	428	Yes	80
	4830SS	2,000	504	Yes	80
	4840SS	2,800	706	Yes	82
	4850SS	3,400	857	Yes	84
4860SS	4,000	1,007	Yes	84	
4870SS	4,800	1,209	Yes	84	
4880SS	5,600	1,411	Yes	85	

## Environmental Considerations




NEMA 12 (IP54) Cabinet Coolers (dust-tight, oil-tight) are ideal for general industrial environments where no liquids or corrosives are present.

NEMA 4 (IP66) Cabinet Coolers (dust-tight, oil-tight, splash resistant, indoor/outdoor service) incorporate a low pressure relief valve for both the vortex tube and cabinet air exhaust. This valve closes and seals when the cooler is not operating, to maintain the integrity of a NEMA 4 enclosure.

NEMA 4X (IP66) Cabinet Coolers offer the same protection as NEMA 4 but are constructed of stainless steel for food service and corrosive environments.

See page 161 for a complete description of each Cabinet Cooler and Cabinet Cooler System.

## Dimensions

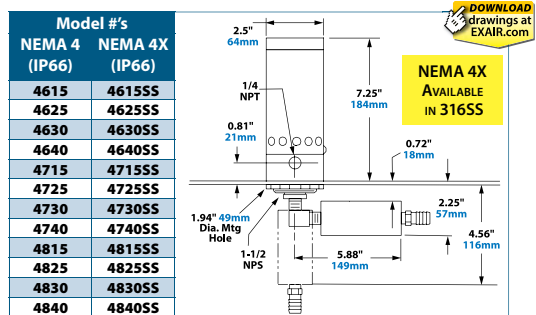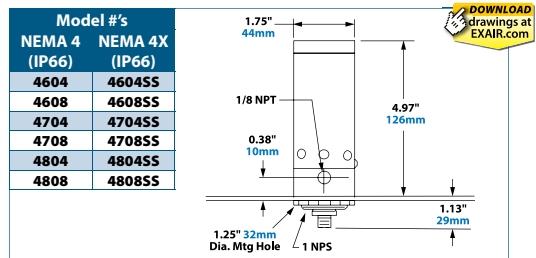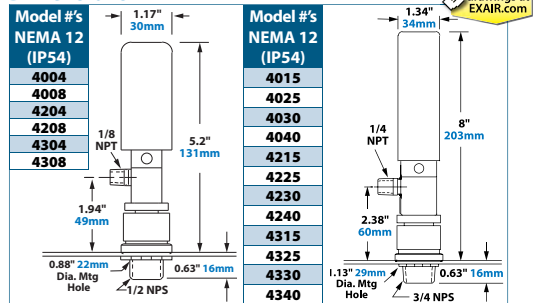

\*Cooling Capacity at 100 PSIG (6.9 BAR) Supply Pressure. \*\*with optional cold muffler installed.

## Sizing Guide - How To Calculate Heat Load For Your Enclosure

To determine the correct model for your application, it is first necessary to determine the **total heat load** to which the control panel is subjected. This total heat load is the combination of two factors - heat dissipated within the enclosure and heat transfer from outside into the enclosure.

### To Calculate Btu/hr.:

1. First, determine the approximate Watts of heat generated within the enclosure.  $\text{Watts} \times 3.41 = \text{Btu/hr.}$
2. Then, calculate outside heat transfer as follows:
  - a. Determine the area in square feet exposed to the air, ignoring the top of the cabinet.
  - b. Determine the temperature differential between maximum surrounding temperature and desired internal temperature. Then, using the Temperature Conversion Table (*below*), determine the  $\text{Btu/hr./ft.}^2$  for that differential. Multiplying the cabinet surface area times  $\text{Btu/hr./ft.}^2$  provides external heat transfer in Btu/hr.
3. Add internal and external heat loads for total heat load.

### To Calculate Kcal/hr.:

1. First, determine the approximate Watts of heat generated within the enclosure.  $\text{Watts} \times .86 = \text{Kcal/hr.}$
2. Then, calculate outside heat transfer as follows:
  - a. Determine the area in square meters exposed to the air, ignoring the top of the cabinet.
  - b. Determine the temperature differential between maximum surrounding temperature and desired internal temperature. Then, using the Metric Temperature Conversion Table (*below*), determine the  $\text{Kcal/hr./m}^2$  for that differential. Multiplying the cabinet surface area times  $\text{Kcal/hr./m}^2$  provides external heat transfer in Kcal/hr.
3. Add internal and external heat loads for total heat load.

Temperature Conversion Table

Temperature Differential °F	Btu/hr./ft. <sup>2</sup>
5	1.5
10	3.3
15	5.1
20	7.1
25	9.1
30	11.3
35	13.8
40	16.2

### Need Help Sizing EXAIR Cabinet Coolers?

1. Fill out and fax us the "Cabinet Cooler Sizing Guide" on page 158.
2. For answers NOW, call our Application Engineering Department at 1-800-903-9247.

Temperature Conversion Table (METRIC)

Temperature Differential °C	Kcal/hr./m <sup>2</sup>
3	4.5
6	9.7
9	15.1
12	21.0
15	27.0
18	34.0
21	41.0

#### Example:

Internal heat dissipation: 471 Watts or 1,606 Btu/hr.  
 Cabinet area: 40 ft.<sup>2</sup>  
 Maximum outside temperature: 110°F  
 Desired internal temperature: 95°F

The conversion table (*above*) shows that a 15°F temperature differential inputs 5.1 Btu/hr./ft.<sup>2</sup>

$40 \text{ ft.}^2 \times 5.1 \text{ Btu/hr./ft.}^2 = 204 \text{ Btu/hr.}$  external heat load.

Therefore, 204 Btu/hr. external heat load plus 1,606 Btu/hr. internal heat load = 1,810 Btu/hr. total heat load or Btu/hr. refrigeration required to maintain desired temperature.

In this example, the correct choice is a 2,000 Btu/hr. Cabinet Cooler System. Choose a Cabinet Cooler model by determining the NEMA rating of the enclosure (type of environment), and with or without thermostat control.

#### Example:

Internal heat dissipation: 471 Watts or 405 Kcal/hr.  
 Cabinet area: 3.7m<sup>2</sup>  
 Maximum outside temperature: 44°C  
 Desired internal temperature: 35°C

The conversion table (*above*) shows that a 9°C temperature differential inputs 15.1 Kcal/hr./m<sup>2</sup>.

$3.7\text{m}^2 \times 15.1 \text{ Kcal/hr./m}^2 = 56 \text{ Kcal/hr.}$  external heat load.

Therefore, 56 Kcal/hr. external heat load plus 405 Kcal/hr. internal heat load = 461 Kcal/hr. total heat load or Kcal/hr. refrigeration required to maintain desired temperature.

In this example, the correct choice is a 504 Kcal/hr. Cabinet Cooler System. Choose a Cabinet Cooler model by determining the NEMA rating of the enclosure (type of environment), and with or without thermostat control.

# Cabinet Cooler® Systems

## Special Cabinet Coolers

EXAIR manufactures special NEMA 12 (IP54), 4 (IP66), and 4X (IP66) Cabinet Coolers suited to specific environmental requirements:

**High Temperature Cabinet Coolers** (shown top right) for ambients of 125° to 200°F (52° to 93°C) are available. Internal components can withstand high temperatures (like those near furnaces, ovens, etc.).

**Non-Hazardous Purge Cabinet Cooler Systems** (shown middle right) are ideal for dirty areas where contaminants might normally pass through small holes or conduits. Under normal conditions, the NHP Cabinet Cooler Systems provide a slight positive pressure in the enclosure by passing 1 SCFM (28 SLPM) of air through the cooler, when the solenoid valve is in the closed position. When the thermostat detects high temperature, it energizes the solenoid valve to pass full line pressure to the Cabinet Cooler, giving it full cooling capability.

**Type 316 Stainless Steel NEMA 4X Cabinet Coolers** (shown bottom right) are suitable for food service, pharmaceutical, harsh and corrosive environments, and other applications where 316SS is preferred. Capacities from 650 to 5,600 Btu/hr. (164 to 1,411 Kcal/hr.) are available.

EXAIR High Temperature Cabinet Coolers, Non-Hazardous Purge Cabinet Coolers and Type 316 Cabinet Coolers are now available from stock.



## Fax Us The Facts!

### Cabinet Cooler Sizing Guide


Use this form to fax us information about your control panel cooling problem. We'll respond with our recommended solution within 24 hours.

To: Application Engineering Department, **EXAIR Corporation**  
 From: **Name** \_\_\_\_\_  
**Company** \_\_\_\_\_  
**FAX number** \_\_\_\_\_  
**Phone number** \_\_\_\_\_ **Ext.#** \_\_\_\_\_  
**E-mail** \_\_\_\_\_

In a hurry? For help NOW, call our Application Engineering Department at 1-800-903-9247

You can fill this form out online at:  
[www.exair.com/sizing.htm](http://www.exair.com/sizing.htm)

I have completed the information below. I want to know which EXAIR Cabinet Cooler® System is the best choice for my control panel.




\*Using a "Temperature Gun" or infrared thermometer will result in measuring surface temperatures. Air temperatures are needed for the cabinet cooling calculations. Please use a standard thermometer or thermocouple to measure the air temperature.

1. Height (H) \_\_\_\_\_ 2. Width (W) \_\_\_\_\_ 3. Depth (D) \_\_\_\_\_
4. \*External air temperature now? \_\_\_\_\_ °F or °C
5. \*Internal air temperature now? \_\_\_\_\_ °F or °C
6. Maximum external air temperature possible? \_\_\_\_\_ °F or °C
7. Maximum internal air temperature desired? \_\_\_\_\_ °F or °C
8. My cabinet rating is:  NEMA 12  NEMA 4  NEMA 4X  
 Other (explain) \_\_\_\_\_
9. My cabinet is (check all that apply):  Vented - outside air circulates through the enclosure  
 Not Vented - outside air does not circulate through the enclosure  
 Wall mounted  
 Fan(s)/Vent(s) - Indicate diameter or SCFM \_\_\_\_\_  
 Number of fans/vents \_\_\_\_\_
10. Available voltage for thermostat control:  24VDC  110 VAC  240 VAC

Our Toll Free Fax Number Is (866) 329-3924 (U.S. and Canada) \* (513) 671-3363 for International Faxes





### Cold Air Distribution Kit:

The kit includes a length of flexible vinyl tubing used to direct the cold air for circulation, or to hot spots. Tubing connectors and adhesive backed clips to hold the tubing in place are provided.



Systems for continuous operation include a Cabinet Cooler, cold air distribution kit and filter.

**Filtration:** EXAIR Cabinet Cooler Systems include a 5 micron automatic drain water and dirt filter. This filter is **critical** for protection of electronics from water in the compressed air line. If oil is present in the compressed air, a coalescing (oil removal) filter, such as EXAIR Model 9005 is recommended. (See page 163)



Systems with thermostat control include a Cabinet Cooler, thermostat, solenoid valve, cold air distribution kit and filter.

**Humidity:** For a continuous operating Cabinet Cooler, relative humidity inside the enclosure stabilizes at 45%. No moisture condenses inside the enclosure. (The enclosure must be sealed to prevent condensation.)

**Inlet Air Temperature:** Cabinet Cooler Systems provide a 50°F (10°C) temperature drop from supply air temperature when the inlet pressure is 80 PSIG (5.5 BAR). Elevated inlet temperature will produce a corresponding rise in cold air temperature and reduction in cooling capacity. Low air pressures will also reduce the cooling capacity.

**Mounting:** The Cabinet Cooler mounts to the enclosure through a drilled hole or electrical knockout. The NEMA 12 (IP54) Cabinet Coolers may be mounted on the top or side of the panel. NEMA 4 and 4X (IP66) Cabinet Coolers must be mounted on the top of the panel, or on the side of the panel using one of our Side Mount Kits (See page 162).



### Solenoid Valve and Thermostat.

#### Solenoid Valve and Thermostat:

Cabinet Cooler Systems with thermostat control include a solenoid valve and thermostat that limit the flow of compressed air to only when cooling is needed. The solenoid valve is rated 120V, 60Hz or 110V, 50Hz.

It is UL Listed, CSA Certified. See page 162 for more options.




The thermostat is factory set at 95°F (35°C). It will normally hold  $\pm 2^\circ\text{F}$  (1°C) inside the cabinet. It is rated 24VAC-240VAC, 50/60Hz, 24VDC and is UL

Recognized, CSA Certified.



### ETC™ Electronic Temperature Control



<b>Model 9238</b> - 120VAC, 50/60Hz	<b>Model 9239</b> - 240VAC, 50/60Hz
Setting Temperature:	Membrane push button control
Power Supply Current:	165 mA max
Sensor:	Type J Thermocouple
ETC enclosure:	Polycarbonate NEMA 4X (IP66) UL508, UL94-SV
Temperature Sampling Rate:	1 Reading/second
Max. Temp.:	158°F (70°C)
Solenoid Valve:	1/4 NPT
RoHS and CE Compliant	

EXAIR's digital ETC (Electronic Temperature Control) provides precise temperature control for your electrical enclosure. It can accurately maintain a constant temperature that is slightly under the maximum rating of the electronics, permitting just enough cooling for the electronics without going so cold as to waste compressed air. The LED readout of the ETC displays the internal temperature of the electrical enclosure (°F or °C) that is constantly being monitored by a quick response thermocouple. The control activates the solenoid valve (included) when the temperature setting is exceeded. The polycarbonate plastic enclosure of the ETC is suitable for NEMA 12, 4 and 4X environments. (Cabinet Cooler not included.)

# Cabinet Cooler® Systems

## Cabinet Coolers Keep Working at Full Capacity After Six Years of Near Constant Operation

**The Problem:** A manufacturer of automotive radiators had a problem relating to an overheated motor drive which caused one of their two production lines to come to a stop. They used a refrigerant based air conditioner set on the panel, but the air conditioner began leaking water into the inside of the panel. The water got into the motor drive, shorted it out and caused the production line to go down. Not only was production down for 1 month, but the motor drive cost them \$20,000 to replace by the time they purchased, had it shipped and got it installed.



Six years later, this manufacturer contacted EXAIR for another application. They mentioned the old EXAIR Cabinet Cooler system still on the motor drive panel, cranking out cold air. No maintenance had been performed on the Cabinet Cooler System in that time (as none was necessary) even though the environment was quite dirty. It was still working perfectly!



**The Solution:** The manufacturer was unsure of what they were going to use for an air conditioning unit because the motor drives had to stay cool. They purchased EXAIR's **Model 4330 NEMA 12 2,000 Btu/hr. (504 Kcal/hr.) Cabinet Cooler System** with thermostat control for the panel. The Cabinet Cooler System worked perfectly at solving the cooling problem.

**Comment:** When we talk to customers about the EXAIR Cabinet Cooler Systems, one of their initial concerns is how long they last. With a source of clean/dry compressed air, the life span of a Cabinet Cooler can easily be in the range of 20 years or more, since there are no moving parts to wear out. In that time frame, you could have to purchase four refrigerant based units, pay to have them changed out and pay for them to be maintained 2 - 4 times per year, changing filters, replacing compressors, and re-charging refrigerant. Not only does the Cabinet Cooler last a long time, but when it is operating, it produces a positive pressure inside the panel which keeps dust and debris from getting inside your cabinet over time.

## Cooling in a Hostile Environment



**The Problem:** A traditional refrigerant based air conditioner was installed on wastewater clarifier controls but could not withstand the harsh chemical environment of the wastewater industry. Controls on a wastewater clarifier process were mounted outdoors and experienced weather related overheating problems in the hotter months of the year. Not only did higher temperatures compromise the performance of the traditional refrigerant based air conditioner, the corrosive environment from the many different wastewater chemicals, acids and bases prematurely wore the critical moving parts of the air conditioner.

**The Solution:** A **Model 4850SS-316 Cabinet Cooler System** provided 3,400 Btu/hr. (857 Kcal/hr.) of cooling for the clarifier controls and kept them running efficiently. The Cabinet Cooler is resistant to seasonal temperature fluctuations because it operates from a source of compressed air and not ambient air. The 316SS construction also provided high corrosion resistance to the chemical environment. Since EXAIR Cabinet Coolers have no moving parts, another maintenance concern was eliminated.

**Comment:** The inherent reliability of the vortex tube operated Cabinet Cooler System is another important advantage in this application. Because they have no moving parts, **EXAIR Cabinet Coolers are virtually impervious to hostile environments.** Wastewater treatment, chemical processing, paper manufacturing, steel mills and power generation are just a few of the facilities benefiting from this simple, yet effective technology.

# Cabinet Cooler® Systems


## NEMA 12 (IP54) Cabinet Cooler Systems

The following **Continuous Operation Systems** include the NEMA 12 Cabinet Cooler, automatic drain filter and cold air distribution kit.

Model #	Description
4204	275 Btu/hr. (69 Kcal/hr.)
4208	550 Btu/hr. (139 Kcal/hr.)
4215	1,000 Btu/hr. (252 Kcal/hr.)
4225	1,700 Btu/hr. (428 Kcal/hr.)
4230	2,000 Btu/hr. (504 Kcal/hr.)
4240	2,800 Btu/hr. (706 Kcal/hr.)
4250	3,400 Btu/hr. (857 Kcal/hr.)
4260	4,000 Btu/hr. (1,007 Kcal/hr.)
4270	4,800 Btu/hr. (1,209 Kcal/hr.)
4280	5,600 Btu/hr. (1,411 Kcal/hr.)

The following **Thermostat Control Systems** include the NEMA 12 Cabinet Cooler, automatic drain filter, cold air distribution kit, thermostat and solenoid valve.

Model #	Description
4304	275 Btu/hr. (69 Kcal/hr.)
4308	550 Btu/hr. (139 Kcal/hr.)
4315	1,000 Btu/hr. (252 Kcal/hr.)
4325	1,700 Btu/hr. (428 Kcal/hr.)
4330	2,000 Btu/hr. (504 Kcal/hr.)
4340	2,800 Btu/hr. (706 Kcal/hr.)
4350	3,400 Btu/hr. (857 Kcal/hr.)
4360	4,000 Btu/hr. (1,007 Kcal/hr.)
4370	4,800 Btu/hr. (1,209 Kcal/hr.)
4380	5,600 Btu/hr. (1,411 Kcal/hr.)



NEMA 12, 4, and 4X Cabinet Coolers are available in many cooling capacities for large and small control panels.

NEMA 4X models are available in Type 316 stainless steel.

High Temperature and Non-Hazardous Purge Cabinet Coolers are described on page 158.

24VDC and 240VAC Solenoid Valves are available.

If you have special requirements, please contact an Application Engineer.

## NEMA 4 (IP66) Cabinet Cooler Systems

The following **Continuous Operation Systems** include the NEMA 4 Cabinet Cooler, automatic drain filter and cold air distribution kit.

Model #	Description
4704	275 Btu/hr. (69 Kcal/hr.)
4708	550 Btu/hr. (139 Kcal/hr.)
4715	1,000 Btu/hr. (252 Kcal/hr.)
4725	1,700 Btu/hr. (428 Kcal/hr.)
4730	2,000 Btu/hr. (504 Kcal/hr.)
4740	2,800 Btu/hr. (706 Kcal/hr.)
4750	3,400 Btu/hr. (857 Kcal/hr.)
4760	4,000 Btu/hr. (1,007 Kcal/hr.)
4770	4,800 Btu/hr. (1,209 Kcal/hr.)
4780	5,600 Btu/hr. (1,411 Kcal/hr.)

The following **Thermostat Control Systems** include the NEMA 4 Cabinet Cooler, automatic drain filter, cold air distribution kit, NEMA 4/4X solenoid valve and thermostat.

Model #	Description
4804	275 Btu/hr. (69 Kcal/hr.)
4808	550 Btu/hr. (139 Kcal/hr.)
4815	1,000 Btu/hr. (252 Kcal/hr.)
4825	1,700 Btu/hr. (428 Kcal/hr.)
4830	2,000 Btu/hr. (504 Kcal/hr.)
4840	2,800 Btu/hr. (706 Kcal/hr.)
4850	3,400 Btu/hr. (857 Kcal/hr.)
4860	4,000 Btu/hr. (1,007 Kcal/hr.)
4870	4,800 Btu/hr. (1,209 Kcal/hr.)
4880	5,600 Btu/hr. (1,411 Kcal/hr.)

## Cabinet Cooler Only

### NEMA 12 Cabinet Coolers Only

Model #	Description
4004	275 Btu/hr. (69 Kcal/hr.), 1/8 NPT
4008	550 Btu/hr. (139 Kcal/hr.), 1/8 NPT
4015	1,000 Btu/hr. (252 Kcal/hr.), 1/4 NPT
4025	1,700 Btu/hr. (428 Kcal/hr.), 1/4 NPT
4030	2,000 Btu/hr. (504 Kcal/hr.), 1/4 NPT
4040	2,800 Btu/hr. (706 Kcal/hr.), 1/4 NPT

### NEMA 4 Cabinet Coolers Only

Model #	Description
4604	275 Btu/hr. (69 Kcal/hr.), 1/8 NPT
4608	550 Btu/hr. (139 Kcal/hr.), 1/8 NPT
4615	1,000 Btu/hr. (252 Kcal/hr.), 1/4 NPT
4625	1,700 Btu/hr. (428 Kcal/hr.), 1/4 NPT
4630	2,000 Btu/hr. (504 Kcal/hr.), 1/4 NPT
4640	2,800 Btu/hr. (706 Kcal/hr.), 1/4 NPT

### NEMA 4X Cabinet Coolers Only

Model #	Description
4604SS	275 Btu/hr. (69 Kcal/hr.), 1/8 NPT
4608SS	550 Btu/hr. (139 Kcal/hr.), 1/8 NPT
4615SS	1,000 Btu/hr. (252 Kcal/hr.), 1/4 NPT
4625SS	1,700 Btu/hr. (428 Kcal/hr.), 1/4 NPT
4630SS	2,000 Btu/hr. (504 Kcal/hr.), 1/4 NPT
4640SS	2,800 Btu/hr. (706 Kcal/hr.), 1/4 NPT

## NEMA 4X (IP66) Stainless Steel Cabinet Cooler Systems

The following **Continuous Operation Systems** include the NEMA 4X Cabinet Cooler, automatic drain filter and cold air distribution kit.

Model #	Description
4704SS	275 Btu/hr. (69 Kcal/hr.)
4708SS	550 Btu/hr. (139 Kcal/hr.)
4715SS	1,000 Btu/hr. (252 Kcal/hr.)
4725SS	1,700 Btu/hr. (428 Kcal/hr.)
4730SS	2,000 Btu/hr. (504 Kcal/hr.)
4740SS	2,800 Btu/hr. (706 Kcal/hr.)
4750SS	3,400 Btu/hr. (857 Kcal/hr.)
4760SS	4,000 Btu/hr. (1,007 Kcal/hr.)
4770SS	4,800 Btu/hr. (1,209 Kcal/hr.)
4780SS	5,600 Btu/hr. (1,411 Kcal/hr.)

The following **Thermostat Control Systems** include the NEMA 4X Cabinet Cooler, automatic drain filter, cold air distribution kit, NEMA 4/4X solenoid valve and thermostat.

Model #	Description
4804SS	275 Btu/hr. (69 Kcal/hr.)
4808SS	550 Btu/hr. (139 Kcal/hr.)
4815SS	1,000 Btu/hr. (252 Kcal/hr.)
4825SS	1,700 Btu/hr. (428 Kcal/hr.)
4830SS	2,000 Btu/hr. (504 Kcal/hr.)
4840SS	2,800 Btu/hr. (706 Kcal/hr.)
4850SS	3,400 Btu/hr. (857 Kcal/hr.)
4860SS	4,000 Btu/hr. (1,007 Kcal/hr.)
4870SS	4,800 Btu/hr. (1,209 Kcal/hr.)
4880SS	5,600 Btu/hr. (1,411 Kcal/hr.)



## Upgrade your Thermostat Control System

Upgrade your Thermostat Control System to EXAIR's ETC™ Electronic Temperature Control (shown on page 159)

Simply add a:

“-ETC120” (for 120V, 50/60Hz) or “-ETC240” (for 240V, 50/60Hz) to your Thermostat Control Cabinet Cooler System model number.

Example:

Model 4330-ETC120 replaces the standard thermostat and solenoid valve with the ETC.



Dual Cabinet Cooler Systems are available with cooling capacities up to 5,600 Btu/hr. (1,411 Kcal/hr.).

Cabinet Coolers

# Cabinet Cooler® Systems

## Accessories and Components

Model #	Description	Model #	Description
4902	Cold Muffler only	9044	Valve and Thermostat Kit (240V, 50/60Hz)
4904	Cold Air Distribution Kit (For all Cabinet Coolers except 550 Btu/hr. output)	9016	NEMA 4-4X Valve and Thermostat Kit (120V, 50/60Hz)
4905	Cold Air Distribution Kit (For Cabinet Coolers with 550 Btu/hr. output only)	9045	NEMA 4-4X Valve and Thermostat Kit (240V, 50/60Hz)
9004	Automatic Drain Filter Separator, 1/4 NPT, 43 SCFM (1,359 SLPM)	9017	Thermostat Only (24V-240V, 50/60Hz)
9027	Oil Removal Filter (For Cabinet Coolers with 550 Btu/hr. output), 1/4 NPT, 7-24 SCFM (198-680 SLPM)	9018	NEMA 4-4X Solenoid Valve Only (120V, 50/60Hz), 1/4 NPT, 40 SCFM (1,133 SLPM)
9005	Oil Removal Filter (For all Cabinet Coolers except 550 Btu/hr. output), 3/8 NPT, 15-37 SCFM (425-1,048 SLPM)	9024	NEMA 4-4X Solenoid Valve Only (240V, 50/60Hz), 1/4 NPT, 40 SCFM (1,133 SLPM)
9006	Oil Removal Filter, 3/4 NPT, 50-150 SCFM (1,416-4,248 SLPM)	9020	Solenoid Valve Only (120V, 50/60Hz), 1/4 NPT, 40 SCFM (1,133 SLPM)
9008	Pressure Regulator with Gauge, 1/4 NPT, 50 SCFM (1,416 SLPM)	9021	Solenoid Valve Only (200-240V, 50/60Hz), 1/4 NPT, 40 SCFM (1,133 SLPM)
9238	ETC - Electronic Temperature Control (120V, 50/60Hz), 1/4 NPT	9031	Solenoid Valve Only, 24VDC, 1/4 NPT, 40 SCFM (1,133 SLPM)
9239	ETC - Electronic Temperature Control (240V, 50/60Hz), 1/4 NPT	9065	Solenoid Valve Only, 24VDC, 1 NPT, 350 SCFM (9,911 SLPM)
9015	Valve and Thermostat Kit (120V, 50/60Hz)		

EXAIR's Side Mount Kits for NEMA 12, 4 and 4X Cabinet Coolers offer convenient mounting to the side of an electrical enclosure.

## Side Mount Kits

EXAIR's Side Mount Kits make mounting on the side of an electrical enclosure possible when there is limited space on the top or side. (NEMA 4 and 4X Cabinet Cooler Systems must be mounted vertically.) The Side Mount Kits maintain the NEMA rating of large and small NEMA Type 12, 4 and 4X enclosures. They mount in a standard electrical knockout (1-1/2 NPS). Side Mount Kits for NEMA 12 Cabinet Cooler Systems have an aluminum construction. Those for NEMA 4 and 4X Cabinet Cooler Systems are Type 303 or Type 316 stainless steel.



## Accessories and Components

Model #	Description
4909	Side Mount Kit for NEMA 12 Cabinet Coolers up to 550 Btu/hr. (139 Kcal/hr.)
4910	Side Mount Kit for NEMA 12 Cabinet Coolers, 650 Btu/hr. (165 Kcal/hr.) and higher
4906	Side Mount Kit for NEMA 4 and 4X Cabinet Coolers up to 550 Btu/hr. (139 Kcal/hr.)
4907	Side Mount Kit for NEMA 4 and 4X Cabinet Coolers, 650 Btu/hr. (165 Kcal/hr.) and higher
4907-316	Type 316 Stainless Steel Side Mount Kit for NEMA 4 and 4X Cabinet Coolers, 650 Btu/hr. (165 Kcal/hr.) and higher



## 90 Degree Side Mount Kit Dimensions

Model		A	B	C	D	E	F	G
4906	in	2.50	2.50	1.50	3.50	3.03	1 NPS	1-1/2 NPS
	mm	64	64	38	89	77		
4907	in	2.50	2.50	1.50	3.50	3.03	1-1/2 NPS	1-1/2 NPS
	mm	64	64	38	89	77		
4909	in	2.50	2.50	1.50	2.19	1.73	1/2 NPS	1-1/2 NPS
	mm	64	64	38	56	44		
4910	in	2.50	2.50	1.50	2.19	1.73	3/4 NPS	1-1/2 NPS
	mm	64	64	38	56	44		

## Side Mount Kit Dimensions

